


4 Replacing inner parts
② Cleaning of Cylinder



● BRAKE CYLINDER POLISHER® SET (6pcs.)



BRAKE CYLINDER POLISHER® SET (6pcs.)


No. ACP6	400	5
For Aluminum Alloy Cylinder	φ16 · φ24 · φ32	
Molded Cylinder	φ16 · φ24 · φ32	

- For easy cleaning in disc brake cylinders.
- For cleaning inside the cylinders, rust in the groove, dust, etc.
- 2 sizes according to inner diameters of cylinders.
- With hard brush with wear resistance and elasticity.

⚠ CAUTION • BE CAREFUL OF DUST OR NYLON FIBER AS IT MAY CUT AND SCATTER.
• WEAR EYE GLASSES WHEN USING THE TOOL.

*Cylinder Polisher the registered trademark of KYOTO TOOL CO., LTD.

● BRAKE CYLINDER POLISHER®

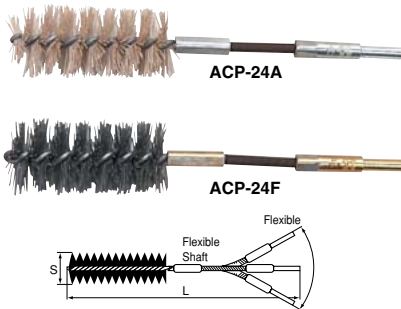

BRAKE CYLINDER POLISHER®


No.	S	L	Type		
ACP-16A	φ16	172	Aluminum For cylinder	30	10
-24A	φ24	175		35	10
-32A	φ32	175		40	10
ACP-16F	φ16	172	Mould For cylinder	30	10
-24F	φ24	175		35	10
-32F	φ32	175		40	10

- For cleaning brake wheel & master cylinders.
- Flexible shaft for easy operation.

⚠ CAUTION • BE CAREFUL OF DUST OR NYLON FIBER AS IT MAY CUT AND SCATTER.
• WEAR EYE GLASSES WHEN USING THE TOOL.

*Cylinder Polisher the registered trademark of KYOTO TOOL CO., LTD.

● BRAKE CYLINDER POLISHER® FOR LARGE SIZED VEHICLES

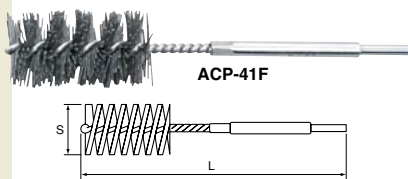

BRAKE CYLINDER POLISHER®

No.	S	L	Type		
ACP-41F	φ41	220	Mould For cylinder	110	5
-51F	φ51	230		160	5
-59F	φ59	250		200	5

- The decisive factor is in the nylon threads which contain polishing agent.
- One polisher can be used for over 3000 cylinders.
- Easy to use. Finish in around 15~30 seconds.

⚠ CAUTION • SCATTERING OF THE NYLON THREADS AND PARTICLES CAN OCCUR, IF BREAKAGE OCCURS.
• ALWAYS WEAR SAFETY GOGGLES WHEN USING.

*Cylinder Polisher the registered trademark of KYOTO TOOL CO., LTD.

● FLEX FLARE NUT WRENCH



FLEX FLARE NUT WRENCH


No.	S ₁ ×S ₂	T	L		
MZF-10	10 × 10	10	143	80	5

Purpose

- Fastening/loosening union nuts (flare nuts) on brake and clutch systems of many types of cars from mini-cars to small trucks.


Special Feature

- Flexible head for wider application, particularly narrow space near master cylinders.
- 15° angled Hexagon head for getting same feeding with double hexagon by continuous reversing operation.(Fig.-1)

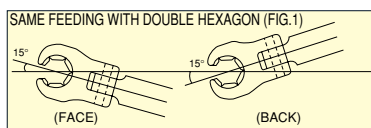


POWERFIT

③ Disassembling of the Pipe



● BRAKE PIPE TOOL SET (2pcs.)

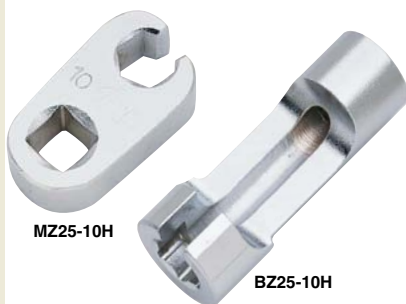

BRAKE PIPE TOOL SET (2pcs.)

No. AB252	▼ g 105	10
Socket for Brake Pipe		BZ25-10H
Claw foot for Brake Pipe		MZ25-10H

Purpose

- Fastening/loosening flare nuts (union nuts) of brake and clutch systems of light cars to small trucks (2t).

Features

- Designed to be compact and effective for the flare nut of master cylinder installed in narrow space.

Application

- Applicable to flare nuts (10mm) of brake and clutch systems of all models of Japanese cars (mini cars, compact cars, passenger cars, light trucks and small trucks.)

Socket wrench for brake pipe


No.	S ₁	D ₁	D ₂	L		
BZ25-10H	10	20	17	54	60	1

Claw foot offset wrench for brake pipe

No.	S	H	L		
MZ25-10H	10	10	40	45	1

- Claw foot offset wrench for brake pipe has an angle of 15 degrees from the center line. The hexagonal end can be used as 12 point end (30 degrees) by repeated operation with the two sides.

POWERFIT



Note : 6pt. Sockets are shown in blue letters. *Please check the merchandise inventory for a product that is marked by ⚠ before placing an order.