

CHAIN TYPE CARTRIDGE WRENCH

No.	Applicable Dia.	L	▼g	
CW-90140	φ90~125(Effective Dia. φ90~140)	140	530	10


Purpose

For removing and replacing oil filter cartridge and fuel filter.

• Applicable to light and medium size cars up to 4t.

Special Features


- Give little damage on filters.
- Original flex band mechanism avoids concentrated load on cartridges.
- Wide application.
- Can be used on cartridge type filter(φ90~125)and fuel filter.
- * Due to the thickness of the chain (10.4mm), cannot be used for some types of filters with narrow niches.

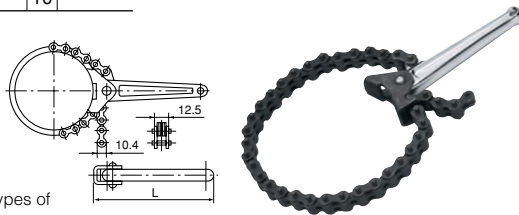

●CHAIN TYPE CARTRIDGE WRENCH

Remove and replace the oil filter


4




OIL FILTER CARTRIDGE WRENCH

No.	Applicable Dia.	▼g	
FF-8095	φ80~95	400	10
FF-90110	φ90~110	410	10

- Adjustable band type.
- Easy for squeezing and slip resistance.



●OIL FILTER CARTRIDGE WRENCH



●STAINLESS SCRAPER

Refit the drain plug

5

- ① Stripping the packing
- ② Attaching the drain plug
- ③ Measuring the tightening torque

●OFFSET WRENCH

●DRAIN PLUG WRENCH

●OTHER TOOLS

●SCREWDRIVER

●T-SHAPED WRENCH

●SOCKET

●OTHER TOOLS

Refit the undercover

6